



Quality First  
For Performance That Lasts

**INTEC's CVD500LCD Extreme Duty Color Mobile Safety Display** has been designed to meet all of the requirements of today's demanding vehicle environments. Our high resolution 5" LCD eliminates blind spots by providing you with clear sharp images. New state-of-the-art electronics enable better contrast and improved image clarity and the automatic brightness control lightens or darkens the screen brightness in accordance with the amount of ambient light around the display.

In addition, INTEC has added an integrated active radar display component. This integration affords an extra level of safety without the added expense of additional hardware and installation time.

With an IP68 rating and flexible mounting options, our displays can be installed where they're needed most, inside or outside. They are easily flush mountable and available in module form for custom and OEM installations.

INTEC continues its record of technology, innovation and highest performance. Combine that with industry leading warranties and a dedicated staff ready to work with you and it's easy to see why Intec is the clear choice for your vehicle safety camera needs.




Radar Integration

**Features Include:**

High Resolution 5" LCD
Automatic Brightness Control with Manual Override
IP68 Waterproof Rating
Integrated Radar Capability with Visual and Audible Alert
Bracket and Flush Mountable
Automatic Distance Grid - Rear Trigger Activated
Camera Position Name Displayed when Selected
Module form for Custom OEM Installs

"With over 200 installs under our belt, we find the Intec camera systems to be the highest quality, and most reliable rear vision systems on the market. Intec's Sales and Service departments are always there for you."

*Art Schleifman, Purchasing, Container Systems & Equipment Company, Inc. Daytona Beach, FL*

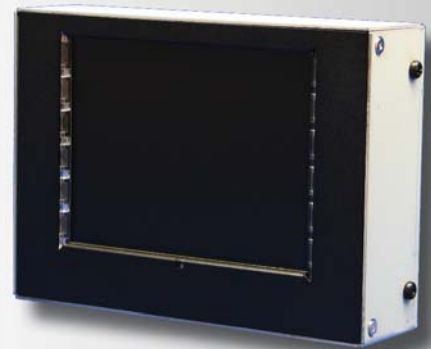

Module Form

Product Specifications			
<b>LCD Size &amp; Type</b>	5" TFT Rapid Start	<b>Pixel Count</b>	Horizontal: 960 Vertical: 234
<b>Pixel Pitch</b>	0.135 (H) x 0.416 (V)	<b>Power Requirement</b>	11 VDC Supplied by the Controller
<b>Power Consumption</b>	On - 10 Watts (1 Camera) SB - 1.5 Watts	<b>Shock and Vibrations</b>	4.5G @ 0-2000 cpm
<b>Operating Temperature Range</b>	-13° to +140° F -25° to +60° C	<b>Weight</b>	1.1 lbs. (Display Only)
<b>Dimensions</b>	W 6.53" x H 5.60" x D 4.40" (with mounting bracket)  W 6.53" x H 4.92" x D 2.03" (without mounting bracket)	<b>Module Dimensions</b>	W 6.25" x H 4.45" x D 1.65"
<b>Color</b>	Black	<b>Options</b>	Radar, Multi Camera Controller, DVR, Swivel Base
<b>Warranty</b>	One year parts & labor Extended warranty available at time of purchase		

The CVD500LCD display is compatible with all current models and most previous versions of the INTEC CVC Series Cameras (some may require an adapter).

Since 1978, Intec Video Systems, Inc. has pioneered the rear vision camera industry setting the standard for others to follow. With the widest field of view available, in both color and black & white versions, operators can easily observe blind spots surrounding their vehicle. Tested to withstand all vehicle generated and environmental conditions, Intec's safety camera systems are the highest performing and longest lasting systems available. Backed by the industry's most reliable warranty, our customers benefit from the lowest total life cycle cost of ownership.



RoHS  
Compliant  
2002 / 95 / EC



e 13

For service and literature please visit [www.intecvideo.com](http://www.intecvideo.com) or call us at (West) 800-468-3254 (East) 800-522-5989  
Intec Video Systems, Inc. 23301 Vista Grande, Laguna Hills, CA 92653  
Intec® and Car Vision® are registered trademarks of Intec Video Systems, Inc. © 2009 Intec Video Systems, Inc.  
CVD500LCD SPEC 04/09 - Specifications Subject to Change Without Prior Notice.