



Quality First For Performance That Lasts



Video Sentinel® Controller VSX361

Controls

Focus (Near, Far),
Gain (Auto/Manual –
Adj. Up, Dn.),
Level (Auto/Manual –
Adj. Up, Dn.),
Polarity (Switchable –
Black Hot, White Hot)

Power

9 – 36 VDC

Connector

Molex PS-5556 Series

Cable

Intec VS Type 16-C

Cable Distance

200 Feet

Inputs

Data, Power

Construction

Sheet Metal
Chassis and Cover

Finish

Powder Coat
Cardinal Black

Environment

95% RH

Temperatures (C)

Operation -40 - +80 Deg
Storage -65 - +150 Deg



Weight

1.5 lbs.

Product Benefits

- **Integrated Camera Controller** for Intec VSC600 Series high performance environmental cameras.
- **9 – 36 VDC Wide Voltage Input** suitable for uneven vehicle electrical systems.
- **Superior Shock and Vibration** resistance withstands industrial and off-road applications.
- **Compatible** with all Intec VSM Series monitors.
- **Universal Mounting Brackets** for ease of installation in a variety of applications.
- **Optional Flush Mount Kit** for in-dash or in-console installations

Dimensions

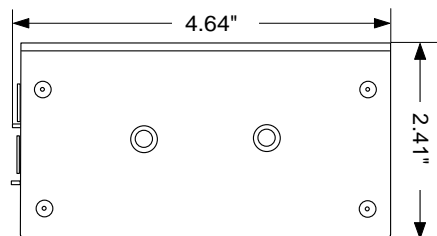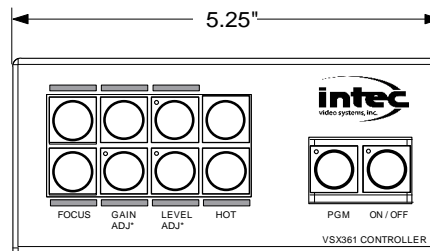

For service and literature:

www.intecvideo.com
West: 800-468-3254
East: 800-522-5989

Intec Video Systems, Inc.
23301 Vista Grande
Laguna Hills, CA 92653

VSX351 SPEC 02/08

Intec® and Video Sentinel® are registered trademarks of Intec Video Systems, Inc.

© 2008 Intec Video Systems, Inc.

Specifications Subject to Change
Without Prior Notice.